


CONNECTION

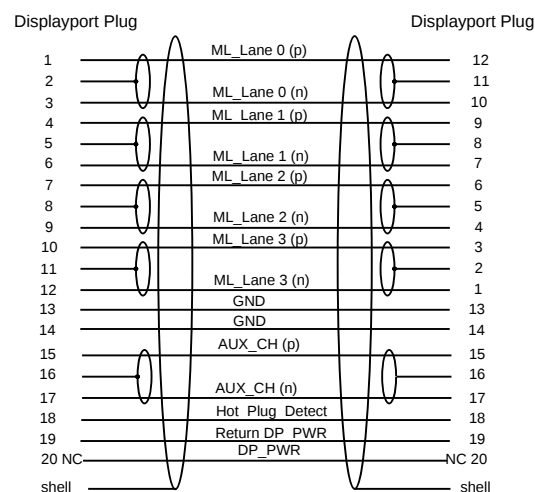

ELECTRIC TESTING:

1. 100% OPEN & SHORT TESTING
2. **INSULATION RESISTANCE: $\geq 20 \text{ M}\Omega$**
3. **CONDUCTOR IMPEDANCE: $\leq 5 \Omega$**
4. VOLTAGE: 300V / 0.1s

4	UL20276[(7/0.08Tc+FM-PE-SKIN)*2C+7/0.08Tc+AL/Mylar]*5P+(7/0.08Tc+PP)*4C+Cotton+Mylar/AL+16/8/0.10Tc)*1C OD=5.5MM Jacket=Black PVC (ABS Non-migration) Marking White:DisplayPort Cable E119932 UL(logo) AWM STYLE 20276 80°C 30V VW-1 Copartner (307191101A00000B)
3	SR - PVC Black 50P(31401012050/YT-1708)
2	Displayport Cover - Black ABS(312010282/312020282)
1	DP Plug Shell Ni-Plated Pin Au-Plated 30u" (303380004N01)
ITEM	SPECIFICATION

	TOLERANCES UNLESS OTHERWISE STATED
X.	= ± 1
.X	= ± 0.2
.XX	= ± 0.1

JAPAN MATERIAL Co., Ltd.					
SAP NO.:		SAMPLE DWG NO:			
DOC No.:		REVISION		A	
CUSTOMER:		UNIT		mm	
P/N:		DPM/2M		SCALE	
DESCRIPTION		DisplayPort Male ~ Both End 32# Nickel-Plated		PAGE NO	
APPROVAL		CHECKED		DATE	
				2016.05.20	
				DRAWN	