


CONNECTION

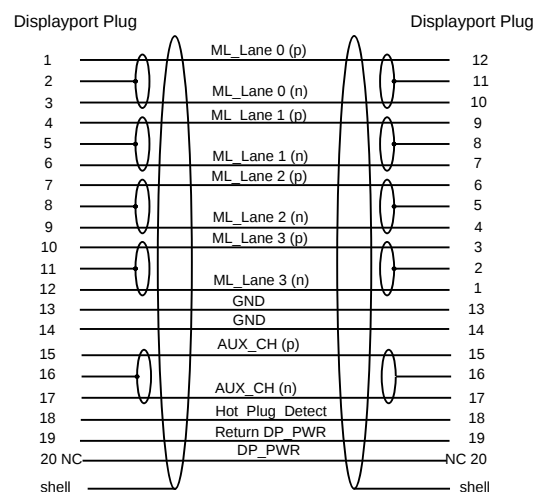

L/(MM)
5000±80
7000±80

ELECTRIC TESTING:

- 100% OPEN & SHORT TESTING
- INSULATION RESISTANCE: $\geq 10 \text{ M}\Omega$
- CONDUCTOR IMPEDANCE: $\leq 10 \Omega$
- VOLTAGE: 300V / 0.1S

4	"UL20276{[(7/0.127Tc+Foam-PE)*2C+7/0.127Tc+AL/Mylar]*5P+(7/0.127Tc+PE)*4C+FILLER+Mylar/AL+24/9/0.10Tc}*1C OD=7.3±0.15MM Jacket=Black PVC Marking White:Display Port TM Logo Cable E81280-D UL(Logo) AWM STYLE 20276 80°C 30V VW-1 CHING TAI(307191601100000B)
3	SR - PVC Black 50P(31401012050/YT-1708)
2	Displayport Cover - Black ABS(312010282/312020282)
1	DP Plug Shell Ni-Plated Pin Au-Plated 30u" (303380004N01)
ITEM	SPECIFICATION

	TOLERANCES UNLESS OTHERWISE STATED
X.	= ± 1
.X	= ± 0.2
.XX	= ± 0.1

JAPAN MATERIAL Co.,Ltd.					
SAP NO.:		SAMPLE DWG NO:			
DOC No.:		REVISION		A	
CUSTOMER:		UNIT		mm	
P/N:		DPM/(5M~7M)		SCALE	
DESCRIPTION		DisplayPort Male ~ Both End 28# Nickel-Plated		PAGE NO	
APPROVAL		CHECKED		DATE	
				2016.05.20	
				DRAWN	