


PINOUT CONFIGURATION

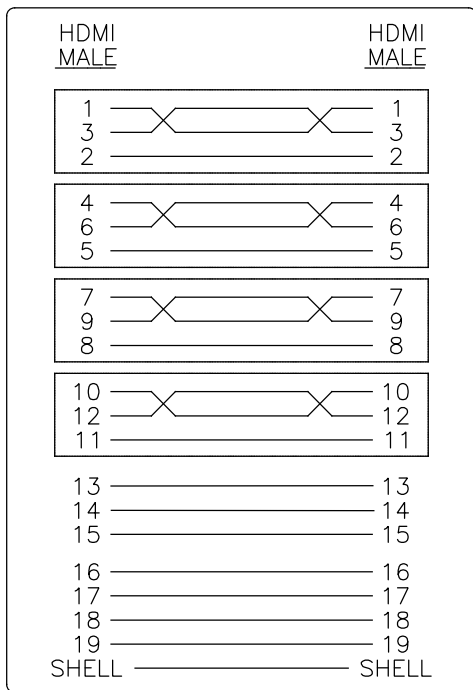

P/N	L±(MM)	BARCODE
HAM/PE20M	20000±200	4522686005408

THIS Hi-PQ™ SERIES WIRE SPEC CAN SUPPORTS THE ELECTRICAL PERFORMANCE ABOVE 5 METERS, AS HEREUNDER.

NOTE

1. THIS ITEM CONTAINS PAT. US 6,287,148 B1, RF-BLOK™ SHIELDING DESIGNS.
2. WIRE MARKING:

(TTL)® E193793 AWM 20276 80°C 30V VW-1 TOTAL TECHNOLOGIES. LTD. ® ← (1 INCH) Hi-PQ™ SERIES  
HIGH DEFINITION PICTURE QUALITY DIGITAL AV CABLE LEVEL-3 SERIES

3. PAD PRINT:

STANDARD HDMI CABLE ®

UNIT: mm

ITEM	DESCRIPTION	QTY.	UNIT
1	HDMI TYPE A 19PIN MALE CONNECTOR W/GOLD PLATED PINS & SHELL UL94V-0	2	PCS.
2	BLACK MOLDED PVC HOOD	2	PCS.
3	PAT. US 6,287,148 B1 RF-BLOK™ SHINING BLACK	2	PCS.
	NICKEL PLATED SHIELDING DIE-CAST METAL CAN		
4	(100Ω SHIELDED TWINSTED PAIRS)x4+7C WIRE; AL-FOIL+85% BRAID;	SEE	DWG.

REVISED DETAILS

REV.	DESCRIPTION	DATE	REVISED BY	P/N:	B	© Copyright 12-2014 JAPAN MATERIAL Co.,Ltd.
				HAM/PE20M	#:141219-1	
					12/19/2014	TTL13/E/JM/141219-1

All information herein is proprietary and the exclusive property of the company. Recipient agrees: 1) Not to disclose any of such information to others 2) Not to reproduce in whole or in part 3) To use such information only as directed by the company. 4) Upon request, to return all copies of this document to the company. Specifications are subject to change without prior notice.