


PINOUT CONFIGURATION

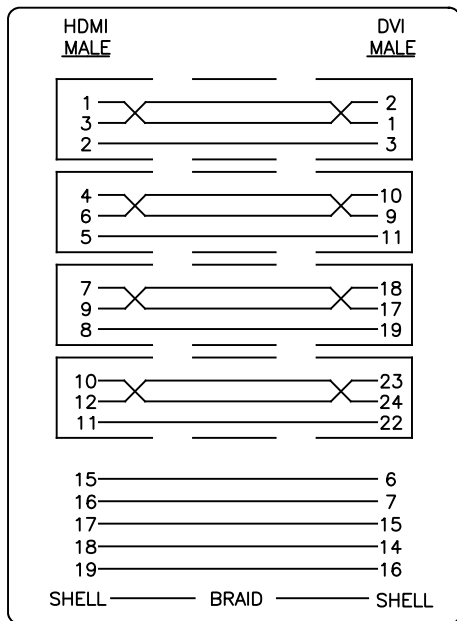

NOTE:

1. THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING DESIGN.
2. WIRE MARKING:

(TTL)® E193793 **RU** AWM 20276 80°C 30V VW-1 TOTAL TECHNOLOGIES. LTD.®

DVI SINGLE LINK DIGITAL SUPER LOW ATTENUATION CABLE (SLAC™)

UNIT: mm

P/N	L±(mm)	BARCODE
HAM-DM/7M	7000±200	4522686005293
HAM-DM/10M	10000±250	4522686005309
HAM-DM/15M	15000±250	4522686005316
HAM-DM/20M	20000±250	4522686005323

ITEM	DESCRIPTION	QTY.	UNIT
1	HDMI TYPE A 19PIN MALE CONNECTOR W/GOLD PLATED PINS UL94V-0	1	PCS.
2	DVI MALE CONNECTOR (18+1)	1	PCS.
3	BLACK MOLDED PVC HOOD	1	PCS.
4	PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN	1	PCS.
5	BLACK #4/40 THUMBSCREW	2	PCS.
6	(100Ω SHIELDED TWISTED PAIRS)x4+5C WIRE+AL-FOIL+85% BRAID; BLACK PVC JACKET	SEE	DWG.
7	PAT. US 6,287,148 B1 RF-BLOK™ NICKEL PLATED SHIELDING METAL CAN	1	PCS.
8	BLACK MOLDED PVC HOOD	1	PCS.

REVISED DETAILS

REV.	DESCRIPTION	DATE

REVISED BY

Part number:

HAM-DM/7M
HAM-DM/10M
HAM-DM/15M
HAM-DM/20M

Revision:

A

Drawing #: 141217-11

Scale: None

Date: 12/17/2014

TTL13/E/JM/141217-11

© Copyright 12-2014
JAPAN MATERIAL Co.,Ltd.