
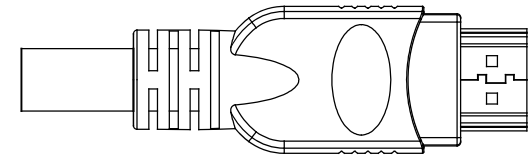


CONNECTION

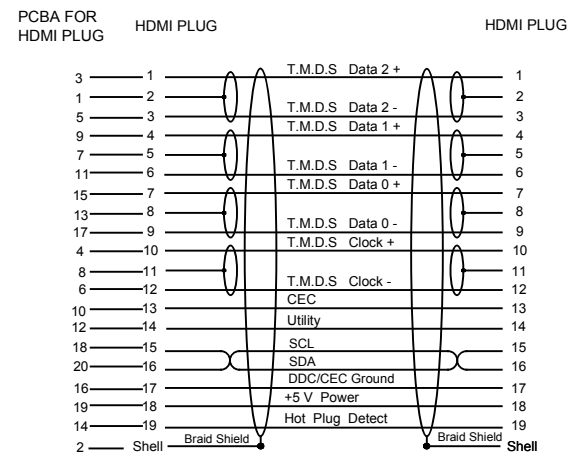

P/N	L/MM	OD/MM	H/MM
HAM/A20M	20000±150	280±10	<=55
HAM/A25M	25000±150	280±10	<=60
HAM/A30M	30000±150	280±10	<=70


4 UL20276{[(1/0.527TA+SKIN-FM-SKIN)*2C+AL+7/0.20TA+Mylar]*4C+(7/0.254TA+HD-PE)*1P+(7/0.127TA+HD-PE)*5C+AL/Mylar+24/8/0.12Tc}*1C OD=8.5MM Jacket=Black PVC CL3 With White Marking:High Speed HDMI® Cable With Ethernet E139956 UL TYPE CL3 SHIELDED 24AWG/8C+22 AWG/2C+28AWG/5C AWM 20276 80°C 30V VW-1 COPARTNER (307186301200000B)

3 PVC - Black 50P(ABS&PS Non-Migration)(YT-1672/1439)

2 HDMI Plug - Gold Plated (303370069GB)

1 HDMI Plug - Gold Plated with PRA

ITEM SPECIFICATION



P / N	HAM/AXXM
DESCRIPTION	HDMI Active cable w/o HEAC 20/25/30M OD:8.5mm

REVISION	A
UNIT	mm
SCALE	NO
PAGE NO	1/1
DATE	2015.1.22