


ALL MATERIAL ARE RoHS AND CALIFORNIA PROP.65 COMPLIANT

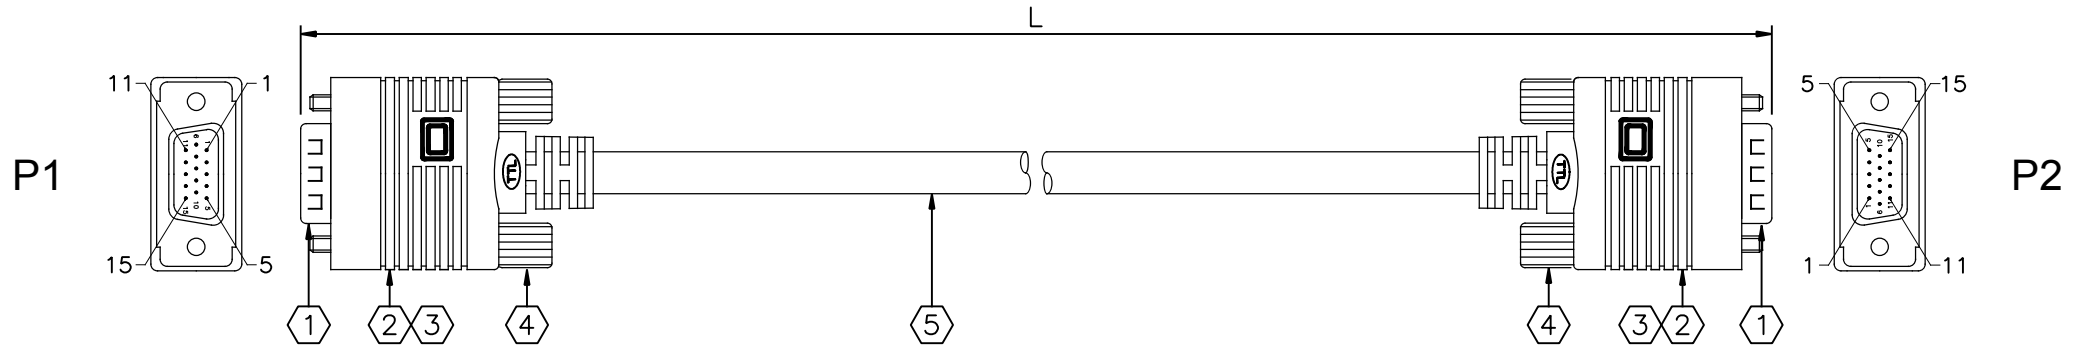

PINOUT CONFIGURATION

P1		P2	
1	RED COAX	1	1
2	GREEN COAX	2	2
3	BLUE COAX	3	3
6	RED SHIELD	6	6
7	GREEN SHIELD	7	7
8	BLUE SHIELD	8	8
4		4	4
5		5	5
9		9	9
10		10	10
11		11	11
12		12	12
13		13	13
14		14	14
15		15	15
SHELL	SHIELD	SHELL	SHIELD

P/N	L±(mm)	BARCODE
V/10M	10000±200	4522686005002
V/20M	20000±250	4522686005019
V/30M	30000±250	4522686005026

UNIT: mm

ITEM	DESCRIPTION	QTY.	UNIT
1	HD15 MALE CONNECTOR	2	PCS.
2	PAT.NO.: US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN	2	PCS.
3	661C BLUE MOLDED PVC HOOD	2	PCS.
4	661C BLUE #4/40 THUMBSCREW	4	PCS.
5	(UL1354 HIGH PRECISION MINI COAX 75Ω WITH DOUBLE SHIELDS)x3C+(CONTROL WIRE)x9C+DOUBLE SHIELD OVERALL; BLACK PVC JACKET.	SEE	DWG.

REVISED DETAILS

REV.	DESCRIPTION	DATE	REVISED BY

Part number:

V/10M
V/20M
V/30M

Revision:

A

Drawing#: 141217-8

Scale: None

Date: 12/17/2014

© Copyright 12-2014

JAPAN MATERIAL Co.,Ltd.

TTL13/E/JM/141217-8

PAGE: 1 of 1

All information herein is proprietary and the exclusive property of the company, Ltd. Recipient agrees: 1) Not to disclose any of such information to others 2) Not to reproduce in whole or in part 3) To use such information only as directed by the company. 4) Upon request, to return all copies of this document to the company. Specifications are subject to change without prior notice.