



REV.	REVISED DESCRIPTION	DATE	CHECKED
1.0	FIRST RELEASE	2016.08.03	
2.0	ADD LASER DATE CODE	2020.04.01	

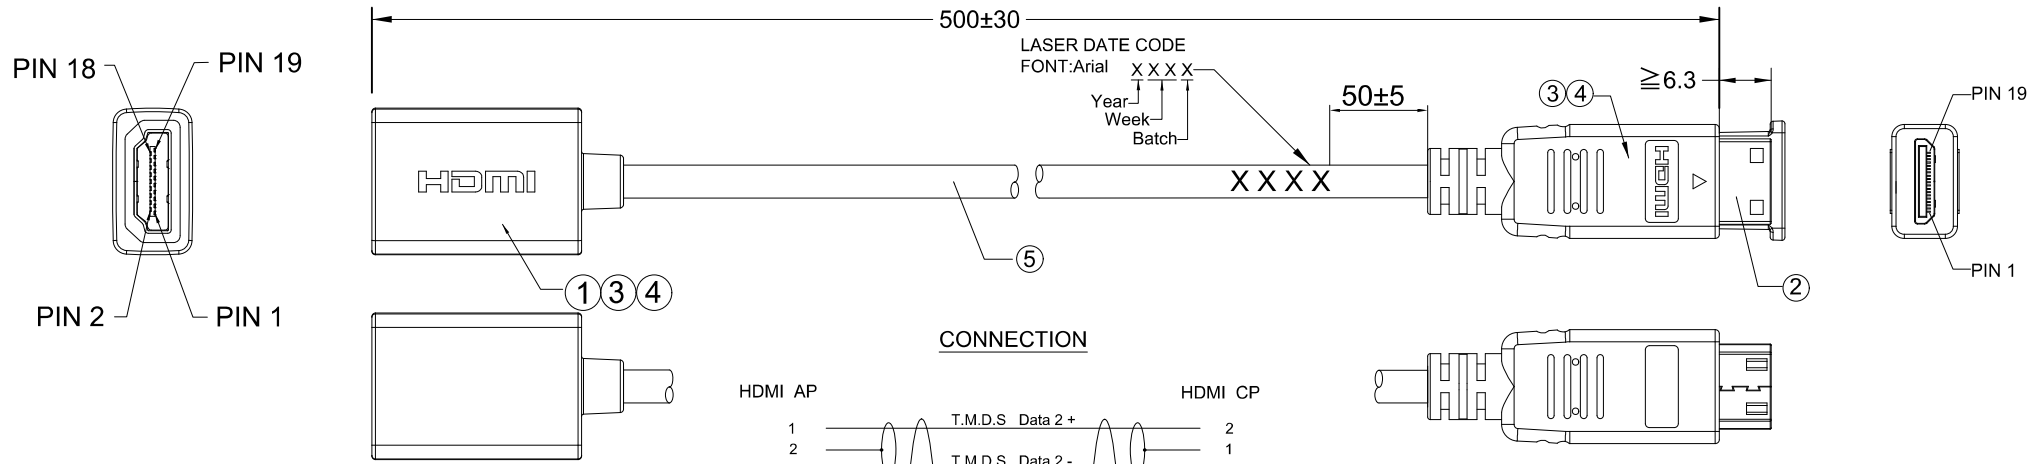


**CONNECTION**

HDMI AP		HDMI CP
1	T.M.D.S Data 2 +	2
2	T.M.D.S Data 2 -	1
3	T.M.D.S Data 1 +	3
4		5
5		4
6	T.M.D.S Data 1 -	6
7	T.M.D.S Data 0 +	8
8		7
9	T.M.D.S Data 0 -	9
10	T.M.D.S Clock +	11
11		10
12	T.M.D.S Clock -	12
13	CEC	
14	Reserve	14
15	SCL	15
16	SDA	16
17	DDC/CEC Ground	13
18	+5 V Power	18
19	Hot Plug Detect	19
Shell		Shell



**HANK SIZE**

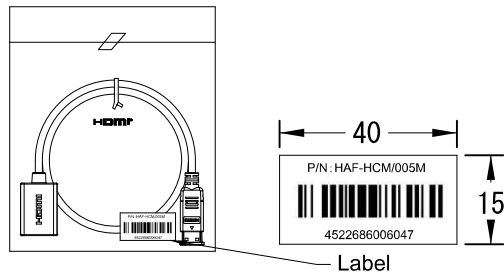

Packing:1PC/PE Bag

**ELECTRICAL TESTING:**

- 100% OPEN&SHORT TESTING
- INSULATION RESISTANCE:  $\geq 20\text{M}\Omega$
- CONDUCTOR RESISTANCE:  $\leq 3\Omega$
- VOLTAGE:DC 300V /0.1S

ITEM	SPECIFICATION
5	[(1/0.16Bc+HDPE*2C)*4P+1/0.203Bc+HDPE+ AL/Mylar]*7C +AL.MYLAR+16/9/0.08Tc 85% Tc Braid*1C OD=4.0MM Jacket=Black PVC (PS Non-Migration)(307B82D01200000)
4	PVC - Black 50P(31401011050)(CYT-3115)(YT-1677)
3	PE - Transparent Low Density
2	HDMI C Plug-Shell/G.F,Pin/Au-Plated 3u"(30337M010G03)
1	HDMI A Jack - Shell/G.Plated 1u" , Pin 15u"(304370124G)

	TOLERANCES UNLESS OTHERWISE STATED
	X. = ± 1
	.X = ± 0.2
	.XX = ± 0.1

		REVISION	2.0
		UNIT	mm
		SCALE	NO
		PAGE NO	1/1
		DATE	2020.04.01
		DRAWN	Y.S
P/N: HAF-HCM/005M			
DESCRIPTION: HDMI AJ TO CP 0.5M			
JAPAN JATERIAL Co.,Ltd.			